


HOSE SADDLES DESIGNED TO SUSPEND AND SAFELY HANDLE FLEXIBLE HOSES

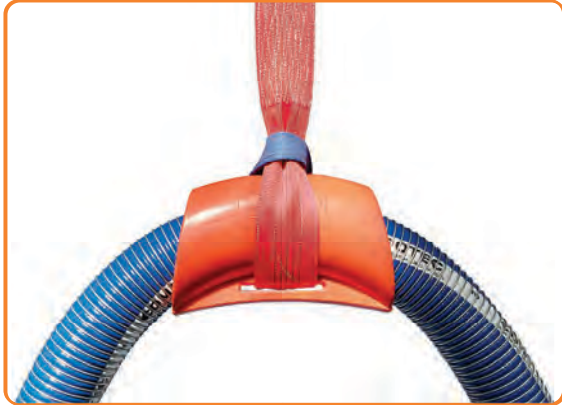

CHARACTERISTICS

- Protect hoses from excessive bending radius and avoid kinking.
- Prevent damages caused by abrasion or impacts.
- Its special design prevent hose from sliding or twisting.
- No maintenance costs.
- Reduce risks of accidents, keep work sites safer.
- Operating conditions -40 to 130°C (-40 + 266°F) with no risk of hydrolysis or aging;
- Anti-spark, insulating, antistatic.
- Resistant to hydrocarbons, oil, petrol, kerosene, and many chemicals.
- Slings are easily replaceable when worn or damaged.
- Available from 3/4" to 16".
- Slings CE approved-UE 23 / EN 1492-1- SF 7:1.

TYPE	DESIGN	SIZE
LR - LONG RADIUS		3/4" - 1"
		1.1/4"
		1.1/2"
		2"
		2.1/2"
SR - SHORT RADIUS		2"
		2.1/2"
		3"
		4"
		6"
		8"
		12"

TECHNICAL DATA													
DIMENSION	3.4" to 1" LR	1" to 1.1/4" LR	1.1/4" to 1.1/2" LR	1.1/2" to 2" LR	2" to 2.1/2" LR and SR	2.1/2" to 3" LR and SR	3" to 4" SR	4" to 6" SR	6" to 8" SR	8" to 10" SR	10" to 12" SR	12" to 14" SR	14" to 16" SR
DN	20	25	32	40	50	65	75	100	150	200	250	300	400
EXT. Ø HOSE RANGE (mm)	19 to 34	34 to 46	46 to 58	58 to 65	65 to 86	86 to 100	100 to 126	126 to 194	194 to 242	242 to 280	280 to 332	332 to 375	375 to 435
RATED CAPACITY (Kg)	500	500	500	500	1000	1000	1000	1000	4000	4000	6000	6000	6000
CODE: 015EZBUN (+)	LRMR020	LRMR025	LRMR032	LRMR040	LRMR050 SRMR050	LRMR065 SRMR065	SRSS075	SRSS100	SRSS150	SRSS200	SRSS250	SRSS300	SRSS400

TYPE MR (up to 2")
Metal Rings only
available upon request



TYPE SS (above 2")
with Simple Sling



LABEL

Color code:
Blue (Polyester)

324242	NORME DI UTILIZZO E SICUREZZA			FOLESTERE 100%	COD. RINTR. COEFF. SIC. 1:7	PORTATA MAX. KG. 5000
	*PRIMA DELL'UTILIZZO VERIFICARE LO STATO IN CASO DI TAGLI O ANOMALIE VA ROTTAMATO			DATA PROD. 2023	EZBUN CE	5000
	*UTILIZZARE SOLAMENTE TRANTI CON ETICHETTE E PORTATE LEGGIBILI. IN PRESENZA SPINGOLI VA PROTETTO CON PARASPIGOLI			MODELLO 150 2000		
	*NON ADOPERARE IL TRANTE CON TEMPERATURE SUPERIORI A -40° A 100° C - IN PRESENZA DI A VERIFICARE LA COMPATIBILITA'			CEN	PORT. KG. 5000 10000 4000 7000	
NB. MARCH. 2000/4208 - D.LGS. 11/2010 - EN 14921			COLORE ROSSO			

BOX all EZBUN are delivered with cardboard box + sling



Matec® Group Srl

Viale Primo Maggio, 7 - 20068 - Peschiera Borromeo (MI) - ITALY
Tel. +39 02 5530 1788 - Fax. +39 02 5472 158
matec@matecgroup.com - www.matecgroup.com